


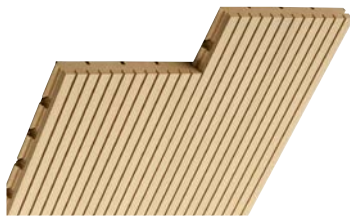
Topakustik Classic

13.5/2.5 M

TOP)A)K)U)S)T)I)K) 


Acoustic panel solutions

The most popular Topakustik types. High sound absorption combined with easy assembly. The grooving remains visible even from a long distance.



Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten.



Fir knotless (ARIA-Pure)


Fir knotless
16 mm

2480 × 128
4080 × 128


Spruce / White Fir (ARIA-Plus)


Spruce / White Fir
20 mm

4080 × 128

Standard

13.5/2.5 M-9.5%



Golfclub Engelberg, CH | Architect: Matthias Buser, Zürich CH

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)

Topakustik AG | Obseestrasse 11 | 6078 Lungern | Schweiz
T +41 41 679 73 73 | contact@topakustik.ch | www.topakustik.ch
CHE-101.964.094 MwSt



A+ und FSC Produkte sind gekennzeichnet / A+ and FSC products are marked / Les produits A+ et FSC sont étiquetés / Prodotti A+ e FSC sono contrassegnati