


Topakustik Classic


14/2 M

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions


formerly: TOPAKUSTIK 14/2 M

The most popular Topakustik types. High sound absorption combined with easy assembly. The grooving remains visible even from a long distance.

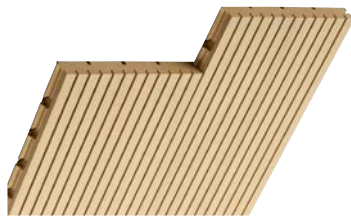

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten or clamping to a H/T-bar with turning-clips.



Normally flammable D-s2,d0 / CH RF 3

-  Painted 16 mm
-  Real wood veneer 17 mm
-  Melamine 16 mm

2780 × 128 2780 × 128 2780 × 128

3640 × 128

4080 × 128 4080 × 128

Flame retardant B-s1,d0 / CH RF 2

-  Painted 16 mm
-  Real wood veneer 17 mm
-  Melamine 16 mm

2780 × 128 2780 × 128 2780 × 128

3640 × 128

4080 × 128 4080 × 128

RESAP® core panel, non-combustible

-  Painted 16 mm
-  Real wood veneer 17 mm

2540 × 128 2540 × 128

3080 × 128 3080 × 128


Custom lengths are also available

14/2 M-7%

αw	Euro	NRC
0.90	A	0.89
0.85	B	0.86

14/2 M-3.5%

αw	Euro	NRC
0.75 L	C	0.74
0.65 LM	C	0.79

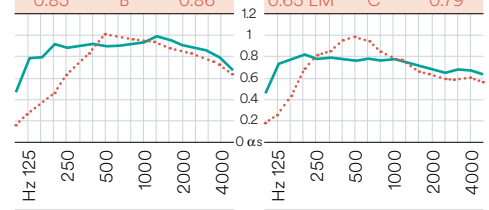

Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Normally flammable D-s2,d0 / CH RF 3

-  Painted 16 mm
-  Real wood veneer 17 mm
-  Melamine 16 mm

4080 × 1216 3640 × 1216 4080 × 1216

2040 × 992/640 2040 × 992/640 2040 × 992/640

2780 × 992/640 2780 × 992/640 2780 × 992/640

3640 × 640 3640 × 640

Flame retardant B-s1,d0 / CH RF 2

-  Painted 16 mm
-  Real wood veneer 17 mm
-  Melamine 16 mm

4080 × 1216 3640 × 1216 4080 × 1216

2040 × 992/640 2040 × 992/640 2040 × 992/640

2780 × 992/640 2780 × 992/640 2780 × 992/640

3640 × 640

RESAP® core panel, non-combustible

-  Painted 16 mm
-  Real wood veneer 17 mm

3080 × 1216 3080 × 1216

1540 × 608 1540 × 608

2540 × 608 2540 × 608

3080 × 608 3080 × 608

ideal = means optimal use of MDF core – custom lengths are also available

Sound absorption data acc. to ISO 354

Suspension height:

— approx. 216 mm

..... approx. 56 mm

with acoustic fleece and Mineral wool 30 mm (60 kg/m³)