


Topakustik Classic


HR 9/2 M

TOP(A)K(U)S(T)I(K) 

Acoustic panel solutions


formerly: TOPAKUSTIK HR 9/2 M

Topakustik also produces planks with special grooves, such as the HR 9/2 M with semi-circular bars.

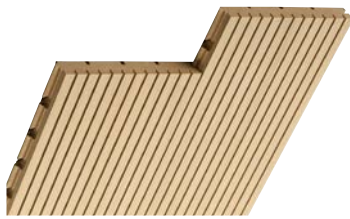

Planks

Thanks to the precise tongue and groove connection, planks result in an attractive surface with a joint-free appearance, because the connecting joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to a timber batten. Installation with Turning-clip is only possible with thickness of 19 mm.



Normally flammable D-s2,d0 / CH RF 3



Painted
16 mm

Flame retardant B-s1,d0 / CH RF 2



Painted
16 mm

Standard

3800 × 128

3800 × 128

Custom lengths are also available

HR 9/2 M-6% α.w Euro NRC

216 mm	0.75 L	C	0.82
56 mm	0.75 M	C	0.85



* During planning, the axial dimension of 10.66 mm must be taken into account.